


## Small Pull Clamp With Top Pull

### 9CD31

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 44mm
- 44mm wide mouth with teeth
- With top pull and 360 degree self tightening pull ring
- Dual self-tightening serrated jaws for a positive grip
- Ideal for work in tight areas
- Capacity : 5 ton (straight way), 2 ton (cross way)

KT NO. 2.38  1 / 6

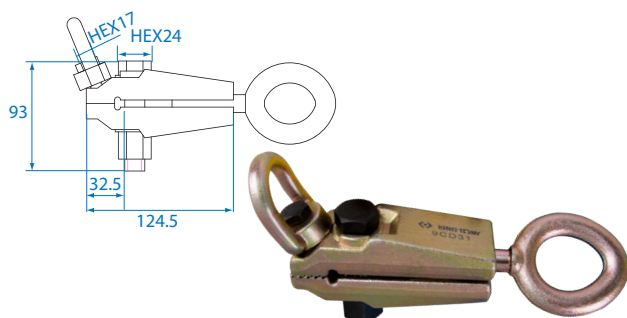

## Double Suction Pad Holder

### 9CW21

- Lifting up to 65 kg in horizontal position
- Adjustable handle designed for curved surface
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal, etc.



| KT NO. | Ø mm | Load capacity kg |  |  |
|--------|------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 9CW21  | 120  | 65               | 805                                                                                 | 4 / 8                                                                               |

## Windscreen Remove Tool Set


### 9CW01

- Use for removing glued of vehicle windows
- Use A with C to pierce the wire through the adhesive beads
- Use the cutting wire with B to remove adhesive beads



#### CONTENTS :

- A - Wire feeder tool
- B - Wire pull handle - pair
- C - Triangle cutting wire - 22 meters

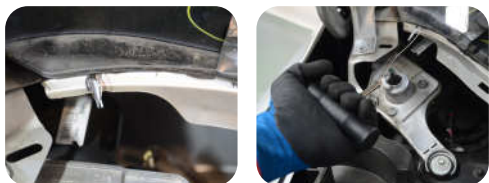

| KT NO. | Wire L m | T Handle L mm |  |  |
|--------|----------|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 9CW01  | 22       | 330           | 456                                                                                 | 8 / 32                                                                              |

## Single Suction Pad Holder

### 9CW22

- Lifting up to 40 kg in horizontal position
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal...



| KT NO. | Ø mm | Load capacity kg |  |  |
|--------|------|------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 9CW22  | 120  | 40               | 351                                                                                   | 6 / 48                                                                                |

